



Features


- 12-volt*, 5,000 mAh lithium ion battery for maximum performance
- Cordless design for ultimate portability
- Lightweight yet powerful
- Dual speed for precise fluid dispensing
- Dual cooling fans for longer battery life
- Electronic overload protection
- Integrated charging port
- Fits all EF Series pump tubes

Maximum Fluid Transfer on Full Charge	
750 gal /2,800 liters (low speed)	
400 gal/1,500 liters (high speed)	

Note: Not intended for use with flammables or in hazardous locations.

Run Time Between Charges				
High Speed	30 minutes			
Low Speed	75 minutes			

Note: Increased head, specific gravity, & viscosity will decrease run time.

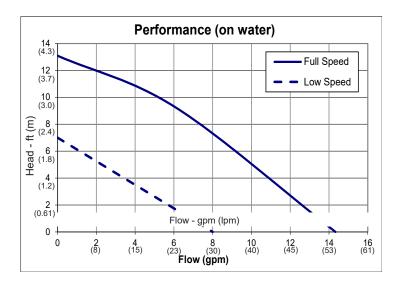

Maximum Performance Limits						
High-Speed	If specific gravity is:	viscosity can not exceed:	Max. Flow gpm (lpm)	Max. Head ft (m)		
Motor	1.0	100 cP	3 (11.4)	14 (4.3)		
Setting	1.1	50 cP	7 (26.5)	11(3.4)		
	1.2	1 cP	12 (45.4)	9 (2.7)		
Low-Speed Motor Setting	If specific gravity is:	viscosity can not exceed:	Max. Flow gpm (lpm)	Max. Head ft (m)		
	up to 1.6	25 cP	6 (22.7)	3 (0.9)		

DRUM/BARREL PUMPS S6 KITS & ACCESSORIES



Motor Kits*

Part Number	Description
108017-3	S6, wall hanger, & 115V charger kit, USA plug
108018-3	S6 & 115V charger kit, USA plug
108017-4	S6, wall hanger, & 230V charger kit, Euro plug
108018-4	S6 & 230V charger kit, Euro plug
108018-5	S6 & 12V car/truck/boat charger kit

^{*}For kits that include pump, please contact factory.

Chargers

Part Num- ber	Description	Input Cord Length	Output Cord Length	
108144	115V charger, USA plug, CE, UL		E ft (1 E m)	
108145	230V charger, Euro plug, CE, UL	3.3 ft (1 m)	5 ft (1.5 m)	
108286	12V car charger, 12V, CE		3.3 ft (1 m)	



• Double insulated

• Three hour charge time



Hanger

Part Number Description

108287 Wall mount hanger with mounting hardware (charger not included)

• Durable, corrosion resistant nylon

• Stores charger internally

• Holds any EF Series pump tube

• Indicator hole for charger status

RoHS IP24





