

# T100 PRO SERIES MEDIUM PRESSURE

Maximum Flow Rate: 45 gpm (170.4 l/min) 1543 BPD  
Maximum Pressure: 3500 psi (241 bar)

 **WANNER™** HYDRA-CELL® PRO  
SEAL-LESS PUMP TECHNOLOGIES



AVAILABLE  
TO MEET  


UK  
CA  

*T100 Pro Series medium-pressure model  
with Nickel Aluminum Bronze pump head.*

## High-pressure performance with exclusive low-pulse, linear flow that reduces pump energy costs and stress.



- Seal-less design separates the power end from the process fluid end, eliminating leaks, hazards, and the expense associated with seals and packing.
- Low NPSH requirements allow for operation with a vacuum condition on the suction - positive suction pressure is not necessary.
- Can operate with a closed or blocked suction line and run dry indefinitely without damage, eliminating downtime and repair costs.
- Unique diaphragm design handles more abrasives with less wear than gear, screw or plunger pumps.
- Hydraulically balanced diaphragms to handle high pressures with low stress.
- Lower energy costs than centrifugal pumps and other pump technologies.
- Rugged construction for long life with minimal maintenance.
- Compact design and double-ended shaft provide a variety of installation options.

# T100 Pro Medium Pressure | Performance


## Capacities

Model	Max. Input rpm	Plunger Dia.		Max. Flow Capacities			Max. Pressure Ratings Discharge		Max. Pressure Ratings Inlet	
		inches	mm	gpm	l/min	BPD	psi	bar	psi	bar
T100K	450	1.750	44	45.0	170.4	1543	3000	207	500	34
T100M	450	1.625	41	38.0	143.8	1302	3500	241	500	34

Consult factory when operating below 45 rpm

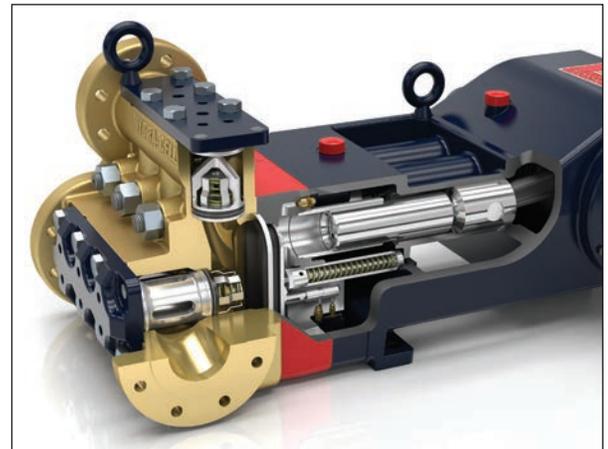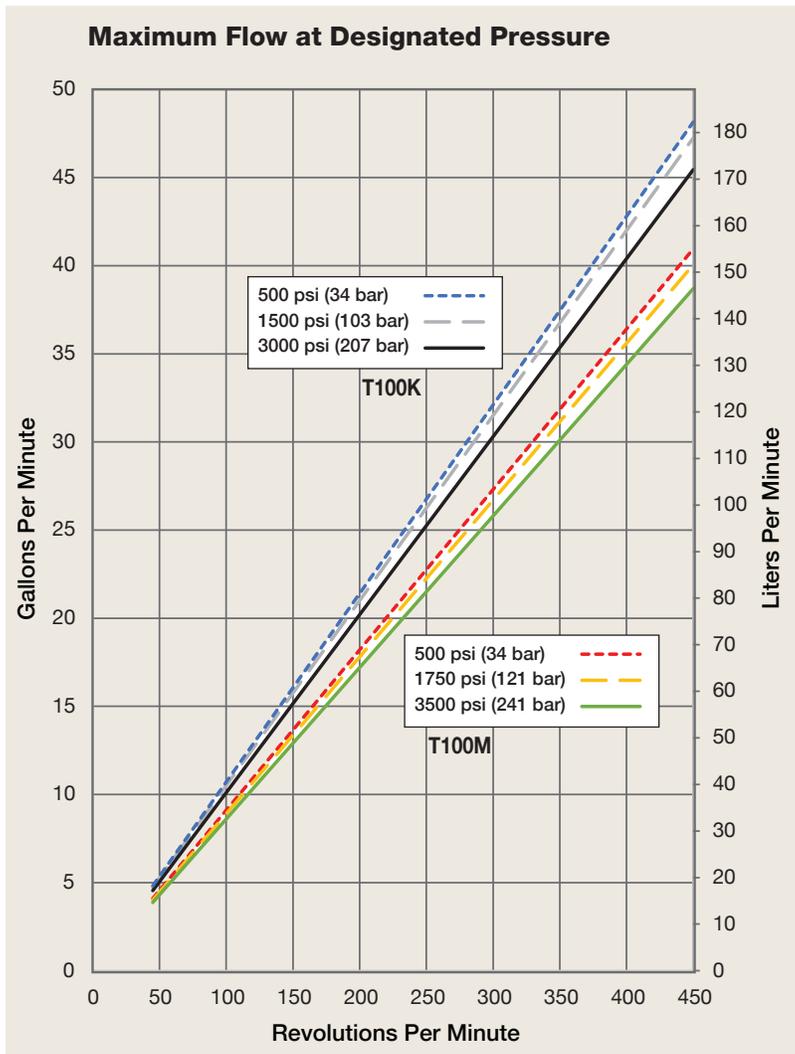

T100 Pro Series pumps feature the Hydra-Cell seal-less design, eliminating clean-up costs from leaking seals or packing and protecting operators from dangerous fluids such as those containing hydrogen sulfide.

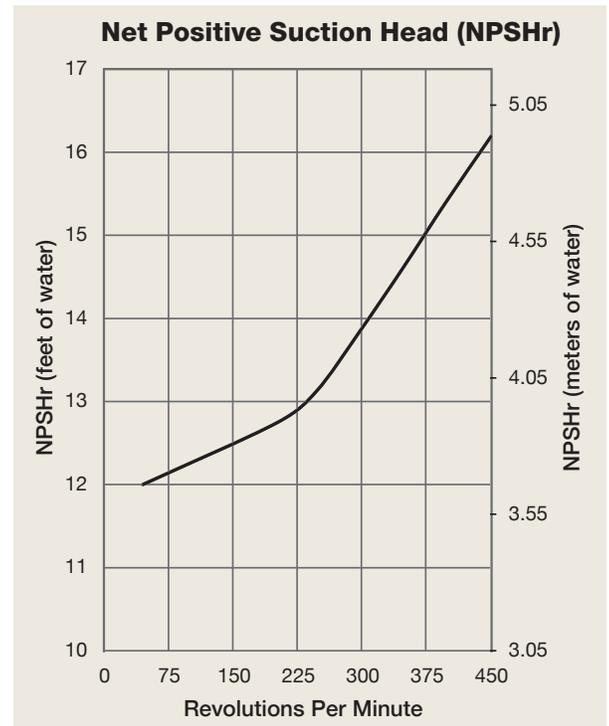

Due to the Wanner Engineering Continuous Improvement Program, specifications and other data are subject to change.

# T100 Pro Medium Pressure | Specifications

## Flow Capacities

Model	Pressure psi (bar)	rpm	gpm	l/min	BPD
T100K	3000 (207)	450	45.0	170.4	1543
T100M	3500 (241)	450	38.0	143.8	1302

## Delivery

	Pressure psi (bar)	gal/rev	liters/rev
T100K	500 (34)	0.107	0.406
	1500 (103)	0.105	0.397
	3000 (207)	0.101	0.384
T100M	500 (34)	0.091	0.345
	1750 (121)	0.089	0.338
	3500 (241)	0.086	0.327

## rpm

Maximum:	450
Maximum API 674:	375
Minimum:	45

Consult factory for speeds less than 45 rpm.

## Maximum Discharge Pressure

Metallic Heads:	T100K	3000 psi (207 bar)
	T100M	3500 psi (241 bar)

## Maximum Inlet Pressure

500 psi (34 bar)

## Operating Temperature

Maximum:	180°F (82.2°C)
Minimum:	40°F (4.4°C)

Consult factory for temperatures outside this range.

## Maximum Solids Size

800 microns

## Input Shaft

Left or Right Side

## Inlet Ports

3-1/2 inch Class 300 RF ANSI Flange or 2-1/2 inch NPT

## Discharge Ports

1-1/2 inch Class 2500 RTJ ANSI Flange or 1-1/2 inch NPT

## Plunger Stroke Length

3-1/2 inch (88.9 mm)

## Shaft Diameter

3 inch (76.2 mm)

## Shaft Rotation

Uni-directional (See rotation arrow.)

## Oil Capacity

18 US quarts (17 liters) - blank back cover  
20.5 US quarts (19.4 liters) - oil level back cover

See page 5 for oil selection and specification.

## Calculating Required Horsepower (kW)\*

$$\frac{\text{gpm} \times \text{psi}}{1,460} = \text{electric motor hp}^*$$

$$\frac{\text{lpm} \times \text{bar}}{511} = \text{electric motor kW}^*$$

\* hp (kW) is required application power.

## Attention!

When sizing motors with variable speed drives (VFD): It is very important to select a motor and a VFD rated for constant torque inverter duty service and that the motor is rated to meet the torque requirements of the pump throughout desired speed range.

Due to the Wanner Engineering Continuous Improvement Program, specifications and other data are subject to change.

## Weight


Metallic Heads: 1100 lbs. (499 kg)

## Fluid End Materials

Manifold:	Nickel Aluminum Bronze (NAB) Duplex Alloy 2205 Stainless Steel 316L Stainless Steel CF3M Hastelloy CX2M
Diaphragm/Elastomers:	FKM Buna-N Aflas EPDM
Diaphragm Follower Screw:	316 Stainless Steel
Valve Spring Retainer:	PVDF Polypropylene 316 SST Hastelloy C
Check Valve Spring:	Elgiloy Hastelloy C
Valve Disc/Seat:	Tungsten Carbide 17-4 Stainless Steel Nitronic 50 Hastelloy C
Outlet Valve Retainer:	316 Stainless Steel
Plug-Outlet Valve Port:	316 Stainless Steel
Inlet Valve Retainer:	316 Stainless Steel

## Power End Materials


Crankshaft:	Forged Q&T Alloy Steel
Connecting Rods:	Ductile Iron
Crossheads:	12L14 Steel
Crankcase:	Ductile Iron
Bearings:	Spherical Roller/Journal (main) Steel Backed Babbit (crankpin) Bronze (wristpin)

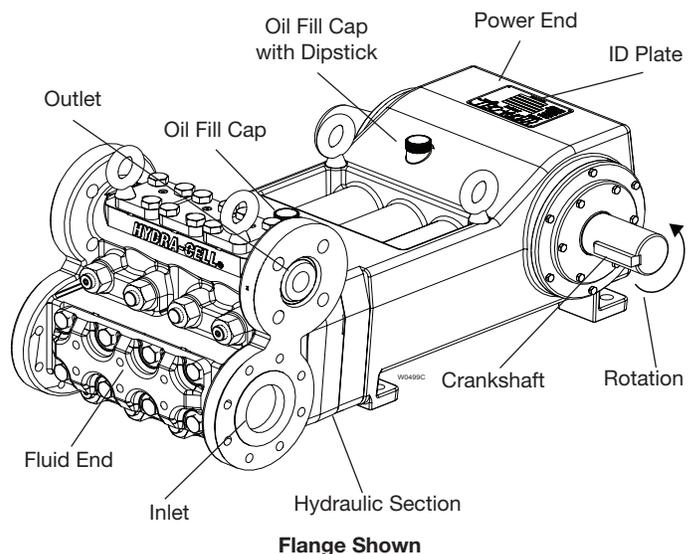


Flange Shown

# T100 Pro Medium Pressure | Drawings

## Threaded Version inches (mm)

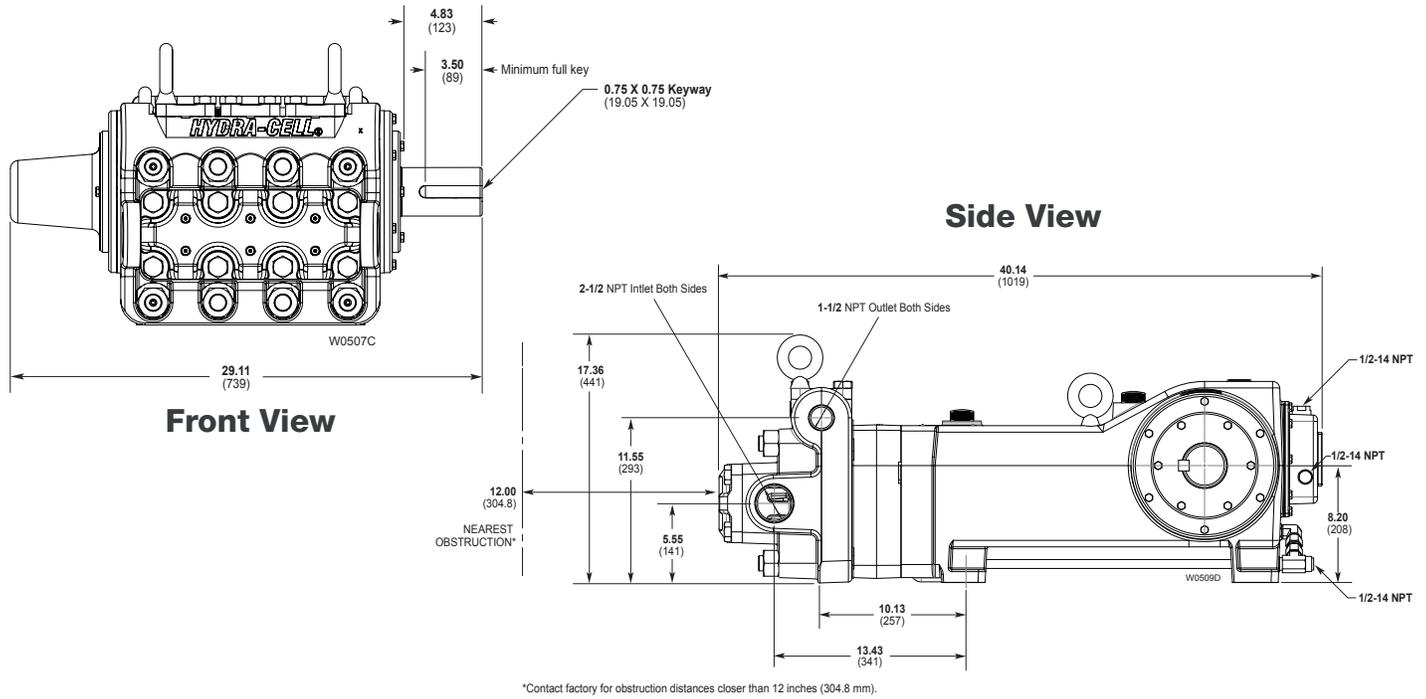

## Flanged Version inches (mm)

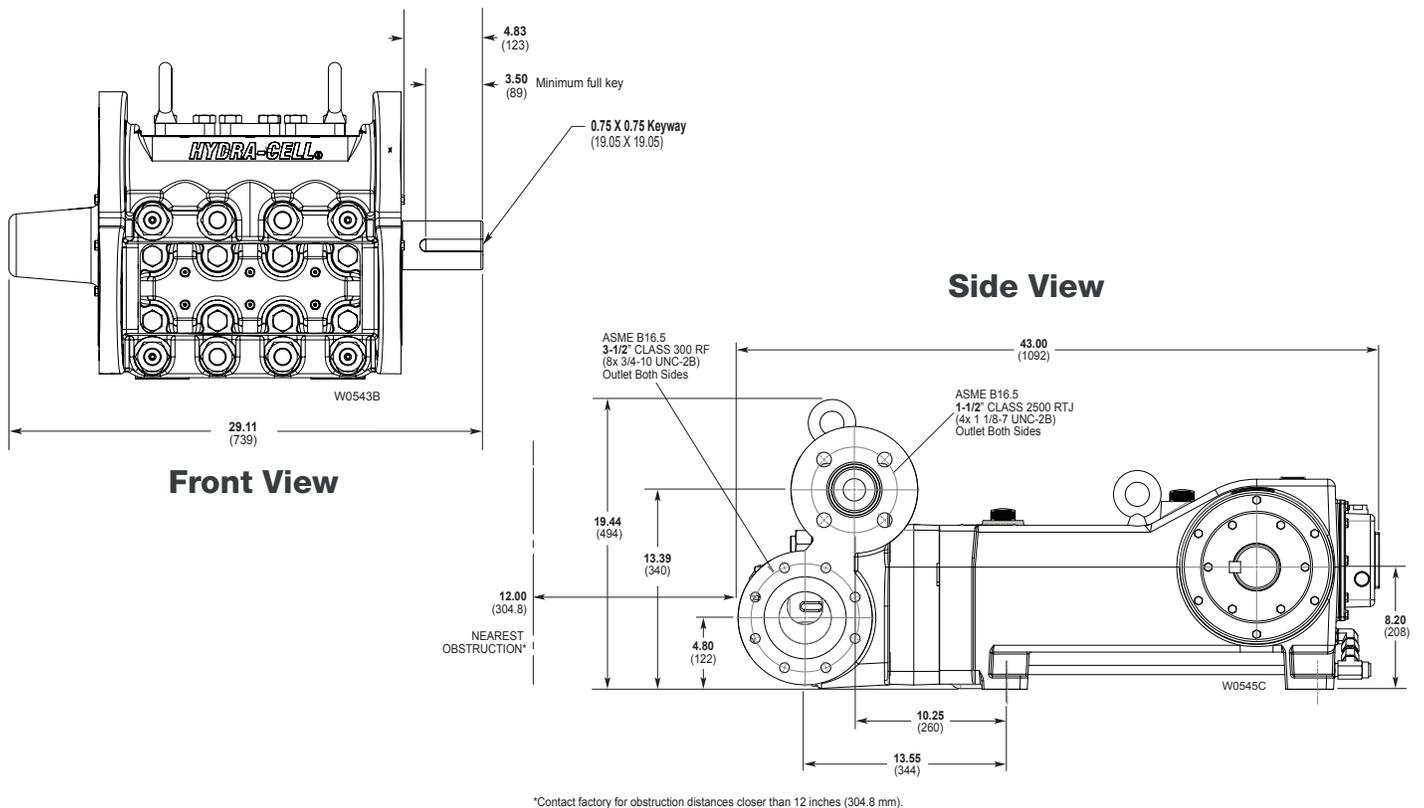

Note: Dimensions are for reference only. Contact factory for certified drawings.

# T100 Pro Medium Pressure | How to Order

## Ordering Information

A complete T100 Series Medium Pressure Model Number contains 14 digits including 10 customer-specified design and materials options, for example: T100KADGDDEPAC.

1	2	3	4	5	6	7	8	9	10	11	12	13	14
T	1	0	0										

## Medium Pressure


Digit	Order Code	Description
<b>1-4</b>	T100	<b>Pump Configuration</b> Shaft-driven
<b>5</b>	K	<b>Performance</b> Max. 45.0 gpm (170.4 l/min) 1543 BPD @ 3000 psi (207 bar)
	M	Max. 38.0 gpm (143.8 l/min) 1302 BPD @ 3500 psi (241 bar)
<b>6</b>	A	<b>Pump Head Version</b> NPT Ports (for NAB only)
	R	ANSI Flanged Ports (RF on Inlet / RTJ on Discharge)
<b>7</b>	D	<b>Pump Head Material</b> Nickel Aluminum Bronze (NAB)
	G	Duplex Alloy 2205 Stainless Steel
	S	316L Stainless Steel CF3M
	T	Hastelloy CX2M
<b>8</b>	A	<b>Diaphragm &amp; O-ring Material</b> Aflas
	E	EPDM (requires EPDM-compatible oil - Digit 13 oil code D)
	G	FKM
	T	Buna-N
<b>9</b>	D	<b>Valve Seat Material</b> Tungsten Carbide*
	H	17-4 Stainless Steel
	N	Nitronic 50
	T	Hastelloy C
<b>10</b>	D	<b>Valve Material</b> Tungsten Carbide*
	F	17-4 Stainless Steel
	N	Nitronic 50
	T	Hastelloy C
<b>11</b>	E	<b>Valve Springs</b> Elgiloy
	T	Hastelloy C

\*Tungsten Carbide valve seat and disc are a matched set and must be purchased together.

Digit	Order Code	Description
<b>12</b>	M	<b>Valve Spring Retainers</b> PVDF
	P	Polypropylene
	S	316 SST
	T	Hastelloy C
<b>13</b>	A	<b>Hydra-Oil</b> 10W30 standard-duty oil
	B	40-wt. oil
	D	EPDM-compatible oil
	E	Food-contact oil
	H	15W50 high-temp severe-duty synthetic oil
<b>14</b>	C	<b>Oil Level Monitor Cover</b> Float switch, normally closed (recommended)
	O	Float switch, normally open
	S	Float switch, Class I, Div. 1, Groups A, B, C, D, normally closed
	T	Float switch, Class I, Div. 1, Groups A, B, C, D, normally open
	W	Float switch, ATEX/IECEx, 4-20 mA analog output (qualification required)
	X	Float switch, ATEX/IECEx, 4-20 mA discrete output (qualification required)
	Y	No switch, flat back cover

**Note:** The Oil Level Monitor Cover is an assembly that replaces the previous back cover on T100 Series pumps. It contains a float switch assembly that can trigger an alarm or shutdown when pre-defined levels of high or low oil are reached. It may also be ordered without a float switch cover.

## Partners in over 70 countries

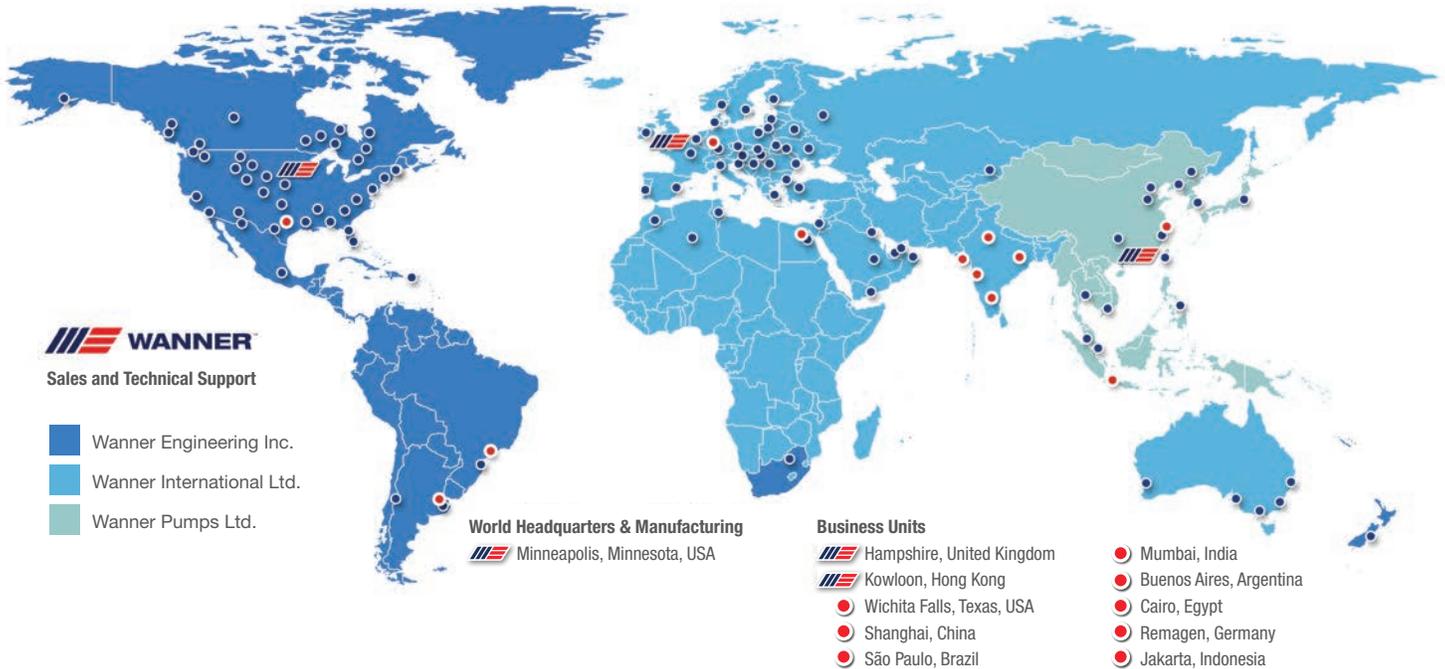

## Wanner worldwide

GLOBAL SALES & TECHNICAL SUPPORT

### WANNER ENGINEERING, INC.™ WORLD HEADQUARTERS & MANUFACTURING

Minneapolis, Minnesota USA  
t: 612-332-5681  
e: sales@wannereng.com  
Hydra-Cell.com

### REGIONAL OFFICE

Wichita Falls, Texas USA  
t: 940-322-7111  
e: sales@wannereng.com

### LATIN AMERICAN OFFICE

São Paulo, Brazil  
t: +55 (11) 99582-1969  
e: mmagoni@wannereng.com  
Hydra-Cell-Pumps.com.br

### WANNER INTERNATIONAL, LTD.™ UNITED KINGDOM

8 & 9 Fleet Business Park  
Sandy Lane • Church Crookham  
Hampshire UK GU52 8BF  
t: +44 (0) 1252 816847  
e: support@wannerint.com  
Hydra-Cell.co.uk

### WANNER PUMPS, LTD.™ Kowloon, HONG KONG

t: +852 3428 6534  
e: sales@wannerpumps.com  
WannerPumps.com

Shanghai, CHINA  
t: +86-21-6876 3700  
e: sales@wannerpumps.com  
WannerPumps.com

