


XASF

Siphon-fed Flat Fan

DESIGN/SPRAY CHARACTERISTICS

- Lowest flow available
- Very fine atomization
- Flat fan spray pattern
- Moderate spray angle (60° - 85°)
- Small forward projection
- Siphon-fed

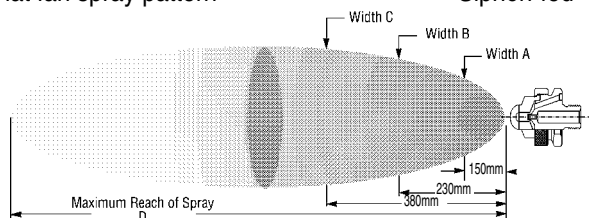

1/4" XA02 SF 050 F
XA 02 Body; F Hardware

Dimensions are approximate. Check with BETE for critical dimension applications.

XA SF Set-up Flow Rates and Dimensions

Siphon-fed, Internal Mix, Flat Fan Spray Pattern, 1/8" and 1/4" Pipe Sizes, BSP or NPT

Pipe Size	Spray Set-Up Number	Fluid Cap and Air Cap Numbers	ATOMIZING AIR		Liquid Capacity in l/h (Liters Per Hour)							Spray Dimensions at 200 mm Siphon Height					
			Air (bar)	Air Capacity (Nm ³ /h)	Gravity Head			Siphon Height				Air (bar)	A (mm)	B (mm)	C (mm)	D (m)	
					450 mm	300 mm	150 mm	100 mm	200 mm	300 mm	600 mm						900 mm
1/8 or 1/4	SF 050	Fluid Cap FC3 & Air Cap AC1101	0.7	1.68	1.3	1.2	1.1	1.0	1.0	0.8	0.6	0.5	0.7	200	260	380	2.1
			1.5	2.58	1.2	1.1	1.0	0.9	0.9	0.8	0.7	0.5	1.5	210	290	380	2.1
			2.0	3.00	0.8	0.8	0.7	0.6	0.5					2.0	230	300	380
	SF 100	Fluid Cap FC6 & Air Cap AC1102	1.5	3.36	3.7	3.5	3.3	2.9	2.8	2.5	2.3	2.1	1.5	230	320	380	2.7
			2.0	3.90	3.4	3.3	3.1	2.8	2.7	2.6	2.4	2.2	2.0	240	340	420	2.7
			3.0	5.22	2.8	2.7	2.5	2.4	2.2	2.1	1.9	1.7	3.0	270	370	460	3.0
	SF 150	Fluid Cap FC2 & Air Cap AC1103	1.5	4.08	5.1	4.8	4.5	3.8	3.7	3.5	3.0	2.4	1.5	190	230	270	3.4
			2.0	4.68	4.9	4.7	4.4	3.6	3.4	3.2	2.9	2.3	2.0	200	250	280	3.4
			3.0	6.18	3.4	3.2	3.0	2.2	2.0	1.7			3.0	220	270	300	3.0
	SF 200	Fluid Cap FC2 & Air Cap AC1104	1.5	3.78	7.6	7.2	6.6	5.7	5.4	5.1	4.6	3.7	1.5	170	220	270	3.4
			2.0	4.38	7.6	7.3	6.8	5.9	5.7	5.5	5.0	4.2	2.0	180	230	290	3.4
			3.0	5.76	6.4	6.1	5.7	5.0	4.5	4.1	3.3		3.0	200	270	330	3.4
3.5	6.60	4.2	3.7	3.2	2.6												

Standard Materials: Nickel-plated Brass, 303 Stainless Steel and 316 Stainless Steel.

AIR ATOMIZING

TO ORDER: specify spray set-up #, pipe size, body style, hardware and mounting assemblies, and material. See page 76.