



EMAIL: FILTRATION@JOHNBROOKS.CA



HPCR Series Filter Cartridges

*Helping to ensure the safety
of the water supply*

Product Specifications

Media: Polypropylene,
Polyethersulfone (0.8)

Gaskets/O-Rings:
Buna-N, EPDM, Silicone, Teflon
Encapsulated Viton, Viton

Micron rating: 0.8, 1.0

End styles:
P2 (226/flat), P3 (222/flat),
P7 (226/fin), P8 (222/fin)

Dimensions

Nominal lengths:

5" 9.75" 10" 20" 30" 40"
12.7 24.8 25.4 50.8 76.2 101.6 cm

Outside diameter: 2.7" (6.86 cm)

Inside diameter: 1.0" (2.54 cm)

Surface Area: 7.0 ft²


Operating Parameters

Maximum operating temperature:
176°F (80°C)

Maximum differential pressure:
75 psid @ 70°F (5.2 bar @ 21°C)
30 psid @ 176°F (2.0 bar @ 80°C)

Maximum reverse pressure:
40 psid @ 70°F (2.8 bar @ 21°C)

Recommended change-out pressure:
35 psid (2.4 bar)

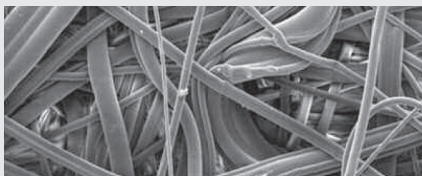

HEALTH DANGERS OF CRYPTOSPORIDIUM

Water borne disease has been traced to Cryptosporidium and Giardia parasites that may be present in many surface water sources. Healthy individuals typically recover from the common gastrointestinal effects, however for individuals with weakened or undeveloped immune systems, it can be life threatening. These naturally occurring organisms are highly resistant to inactivation by conventional water treatment processes such as chlorination and thus require high performance mechanical removal technologies.

In order to ensure the safety of the water supply, standards have been established that define the minimum performance requirements for materials and components of water treatment systems. The HPCR Cyst Reduction filter contains an absolute 1 micron filter media designed to provide a minimum log reduction credit of >3.0 for cysts based on the test requirements of the Long term 2 Enhanced Surface Water Treatment Rule (LT2).

FEATURES & BENEFITS

- Constructed of polypropylene or polypropylene and polyethersulfone — compatible with most solutions
- Double O-Ring style ends for the highest seal integrity
- 7.0 ft² (0.65 m²) of effective filter area — high flow rates at low pressure drop — high dirt capacity
- Various O-Ring materials and configurations — easily retrofits most systems
- High surface area — high flow rates and long on-line service

CERTIFICATIONS

- USP Class VI: Meets USP Class VI Biological Test for Plastics
- FDA Listed Materials: All materials comply with FDA Title 21 of the Code of Federal Regulations Sections 174.5, and 177.1520, as applicable for food and beverage contact.
- LT2: Performance tested and verified by independent 3rd party laboratory to comply with Long Term 2 Enhanced Surface Water Treatment Rule for reduction of cysts. Data available upon request.


HPCR NOMENCLATURE INFORMATION

Filter Type	Retention Rating (microns)	Nominal Length (inches)	End Configuration	Gasket or O-Ring	Options	
HPCR Series	0.8 1	-5 -20	P2 226/Flat Single Open End	B Buna-N	-I Steam Insert	
		-9.75*	-30	P3 222/Flat Single Open End		E EPDM
		-10 -40	P7 226/Fin Single Open End	S Silicone		
			P8 222/Fin Single Open End	T Teflon encap. Viton (O-Rings only)		
Example: HPCR 1-30P7S-I					V Viton	
HPCR	1	-30	P7	S	-I	

*Available only for DOE (P) configuration

HPCR FLOW RATE

Typical Flow Rate Clean Water at Ambient Temperature
(per 10" cartridge)

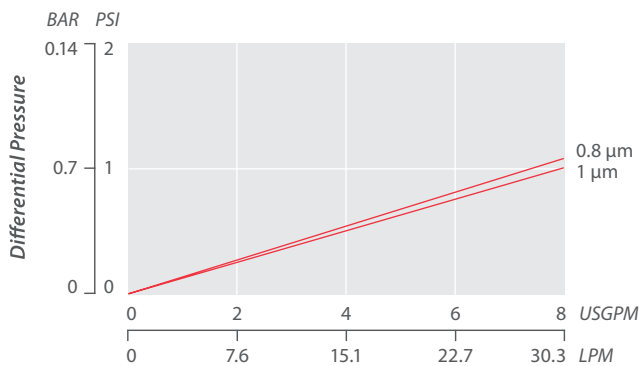

For liquids other than water, multiply pressure drop by the fluid viscosity in centipoise

PERFORMANCE SPECIFICATIONS

Sterilization

Cartridges may be autoclaved for 30 minutes at 250°F (121°C) under no end load conditions. Cartridges fitted with steam insert may be steamed for at least 10 30-minute cycles @ 275°F (135°C) not to exceed 3 psid (0.21 bar).



**SPRAYING
PUMPING
FILTERING
AND VALVES**

1-877-624-5757
www.johnbrooks.ca